


Flange Adapter M7180



The ideal product to transition from flanged to grooved components, this flange adapter is compatible with ANSI Class 125/150. Pressure ratings conform to the pressure rating of installed couplings.

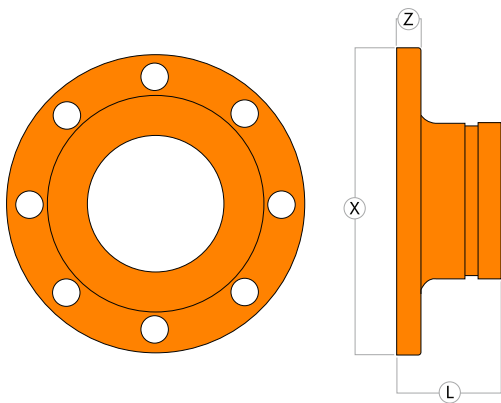

Materials

Ductile iron, non-lead orange rust-inhibiting paint coating, ASTM A536, Grade 65-45-12



Nominal Size	Pipe OD	ANSI 125/150	Dimensions			Bolts		Approx. Weight	Model Number
			L	X	Z	Qty	Size		
in/mm	in/mm	in/mm	in/mm	in/mm	in/mm		in/mm	lb/kg	
2 50	2.375 60.3	4.75 121	2.50 64	6.50 165	0.63 16	4	5/8 M16	3.4 1.5	M7180X2
3 80	3.5 88.9	6.00 152	2.75 70	7.87 200	0.63 16		5/8 M16	5.4 2.4	M7180X3
4 100	4.5 114.3	7.50 191	3.00 76	9.00 229	0.63 16	8	5/8 M16	7.8 3.5	M7180X4
6 150	6.625 168.3	9.50 241	3.00 76	11.46 291	0.94 24		3/4 M20	11 4.9	M7180X6