


HDPE Coupling M95



Mechanical HDPE couplings offer a cost-effective, fast and easy way to join high density polyethylene pipe and fittings.

Munro HDPE couplings offer a lighter, easier to handle design with sharp, well-defined teeth for maximum penetration and grip. Engineered to satisfy the working pressure of DR 7.3 to DR 32.5, every Munro HDPE coupling uses 4 high-quality bolts and flanged nuts or washers for improved tightening and holding.

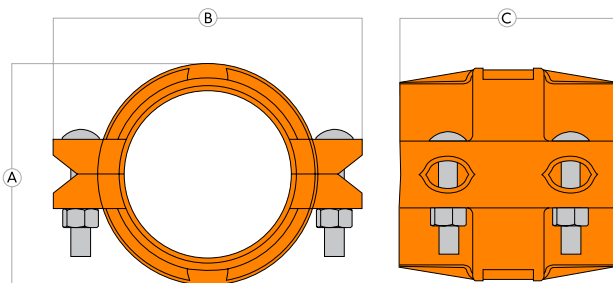

Materials	
Couplings	Ductile iron, non-lead orange rust-inhibiting paint coating, ASTM A536, Grade 65-45-12
Gaskets	Nitrile, orange color-coded, service temperature: -20°F to 180°F (-29°C to 82°C)
Bolts	Carbon steel, heat treated and zinc plated, tensile strength to 110,000 psi: ASTM A 183 Grade 2
Nuts	Carbon steel, zinc plated: ASTM 563 Grade 2
Flanged Nuts	Carbon steel, and zinc plated: ASME B18.2.2-2010. Flanged Nuts have a metric head

Nominal Size	Pipe OD	Dimensions			Bolts		Approx. Weight	Model Number
		A	B	C	Qty	Size		
in/mm	in/mm	in/mm	in/mm	in/mm		in/mm	lb/kg	
2 50	2.375 60.3	2.7 68.58	4.7 119.38	4.6 116.84	4	3/8 x 2 3/8 M10 x 60	4 1.81	M95X2
3 80	3.5 88.9	3.9 99.06	7.10 180	4.6 116.84		1/2 x 3 M12 x 75	7 3.2	M95X3
4 100	4.5 114.3	4.9 124.46	8.40 213	5.75 146.05		1/2 x 3 M12 x 75	9 4.1	M95X4
6 150	6.625 168.3	7.1 180.34	10.30 216	5.85 148.59		5/8 x 3 1/2 M16 x 90	15 6.8	M95X6
8 200	8.625 219.1	9.1 231.14	13.20 335	6 152.4		5/8 x 3 1/2 M16 x 90	21 9.5	M95X8
10 250	10.750 273.0	11.4 289.56	15.90 403	6.5 165.1		3/4 x 4 3/4 M20 x 120	30 13.6	M95X10
12 300	12.75 323.9	14.5 368.3	17.5 444.5	7.25 184.15		3/4 x 4 3/4 M20 x 120	47 21.31	M95X12