




SIMPLICITY70
Pressure Boost (Straight Centrifugal with Bypass)

- **Performance Range:** 70 PSI @ 30 GPM to 50 PSI @ 110 GPM
- **Power Options:**
 - 230V/1PH
 - 208V/3PH
 - 230V/3PH
 - 460V/3PH
- **Station Start Options:**
 - Clock Start (From External 24V Signal)
 - Remote Pressure Start (From Change in System Pressure)

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	<div>munro</div> <div>REV. A TITLE: Overview</div> <div>SIZE B Job Name: Simplicity - Pressure Boost</div> <div>SCALE: 1:6 SHEET 1 OF 4</div>	
DIMENSIONS ARE IN INCHES		DRAWN	ZTG		
TOLERANCES:		CHECKED			
FRACTIONAL ±		ENG APPR.			
ANGULAR: MACH ± BEND ± °		Q.A.			
TWO PLACE DECIMAL ±		COMMENTS:			
THREE PLACE DECIMAL ±					
INTERPRET GEOMETRIC TOLERANCING PER:					
MATERIAL					
FINISH					
BG-16					
DO NOT SCALE DRAWING					

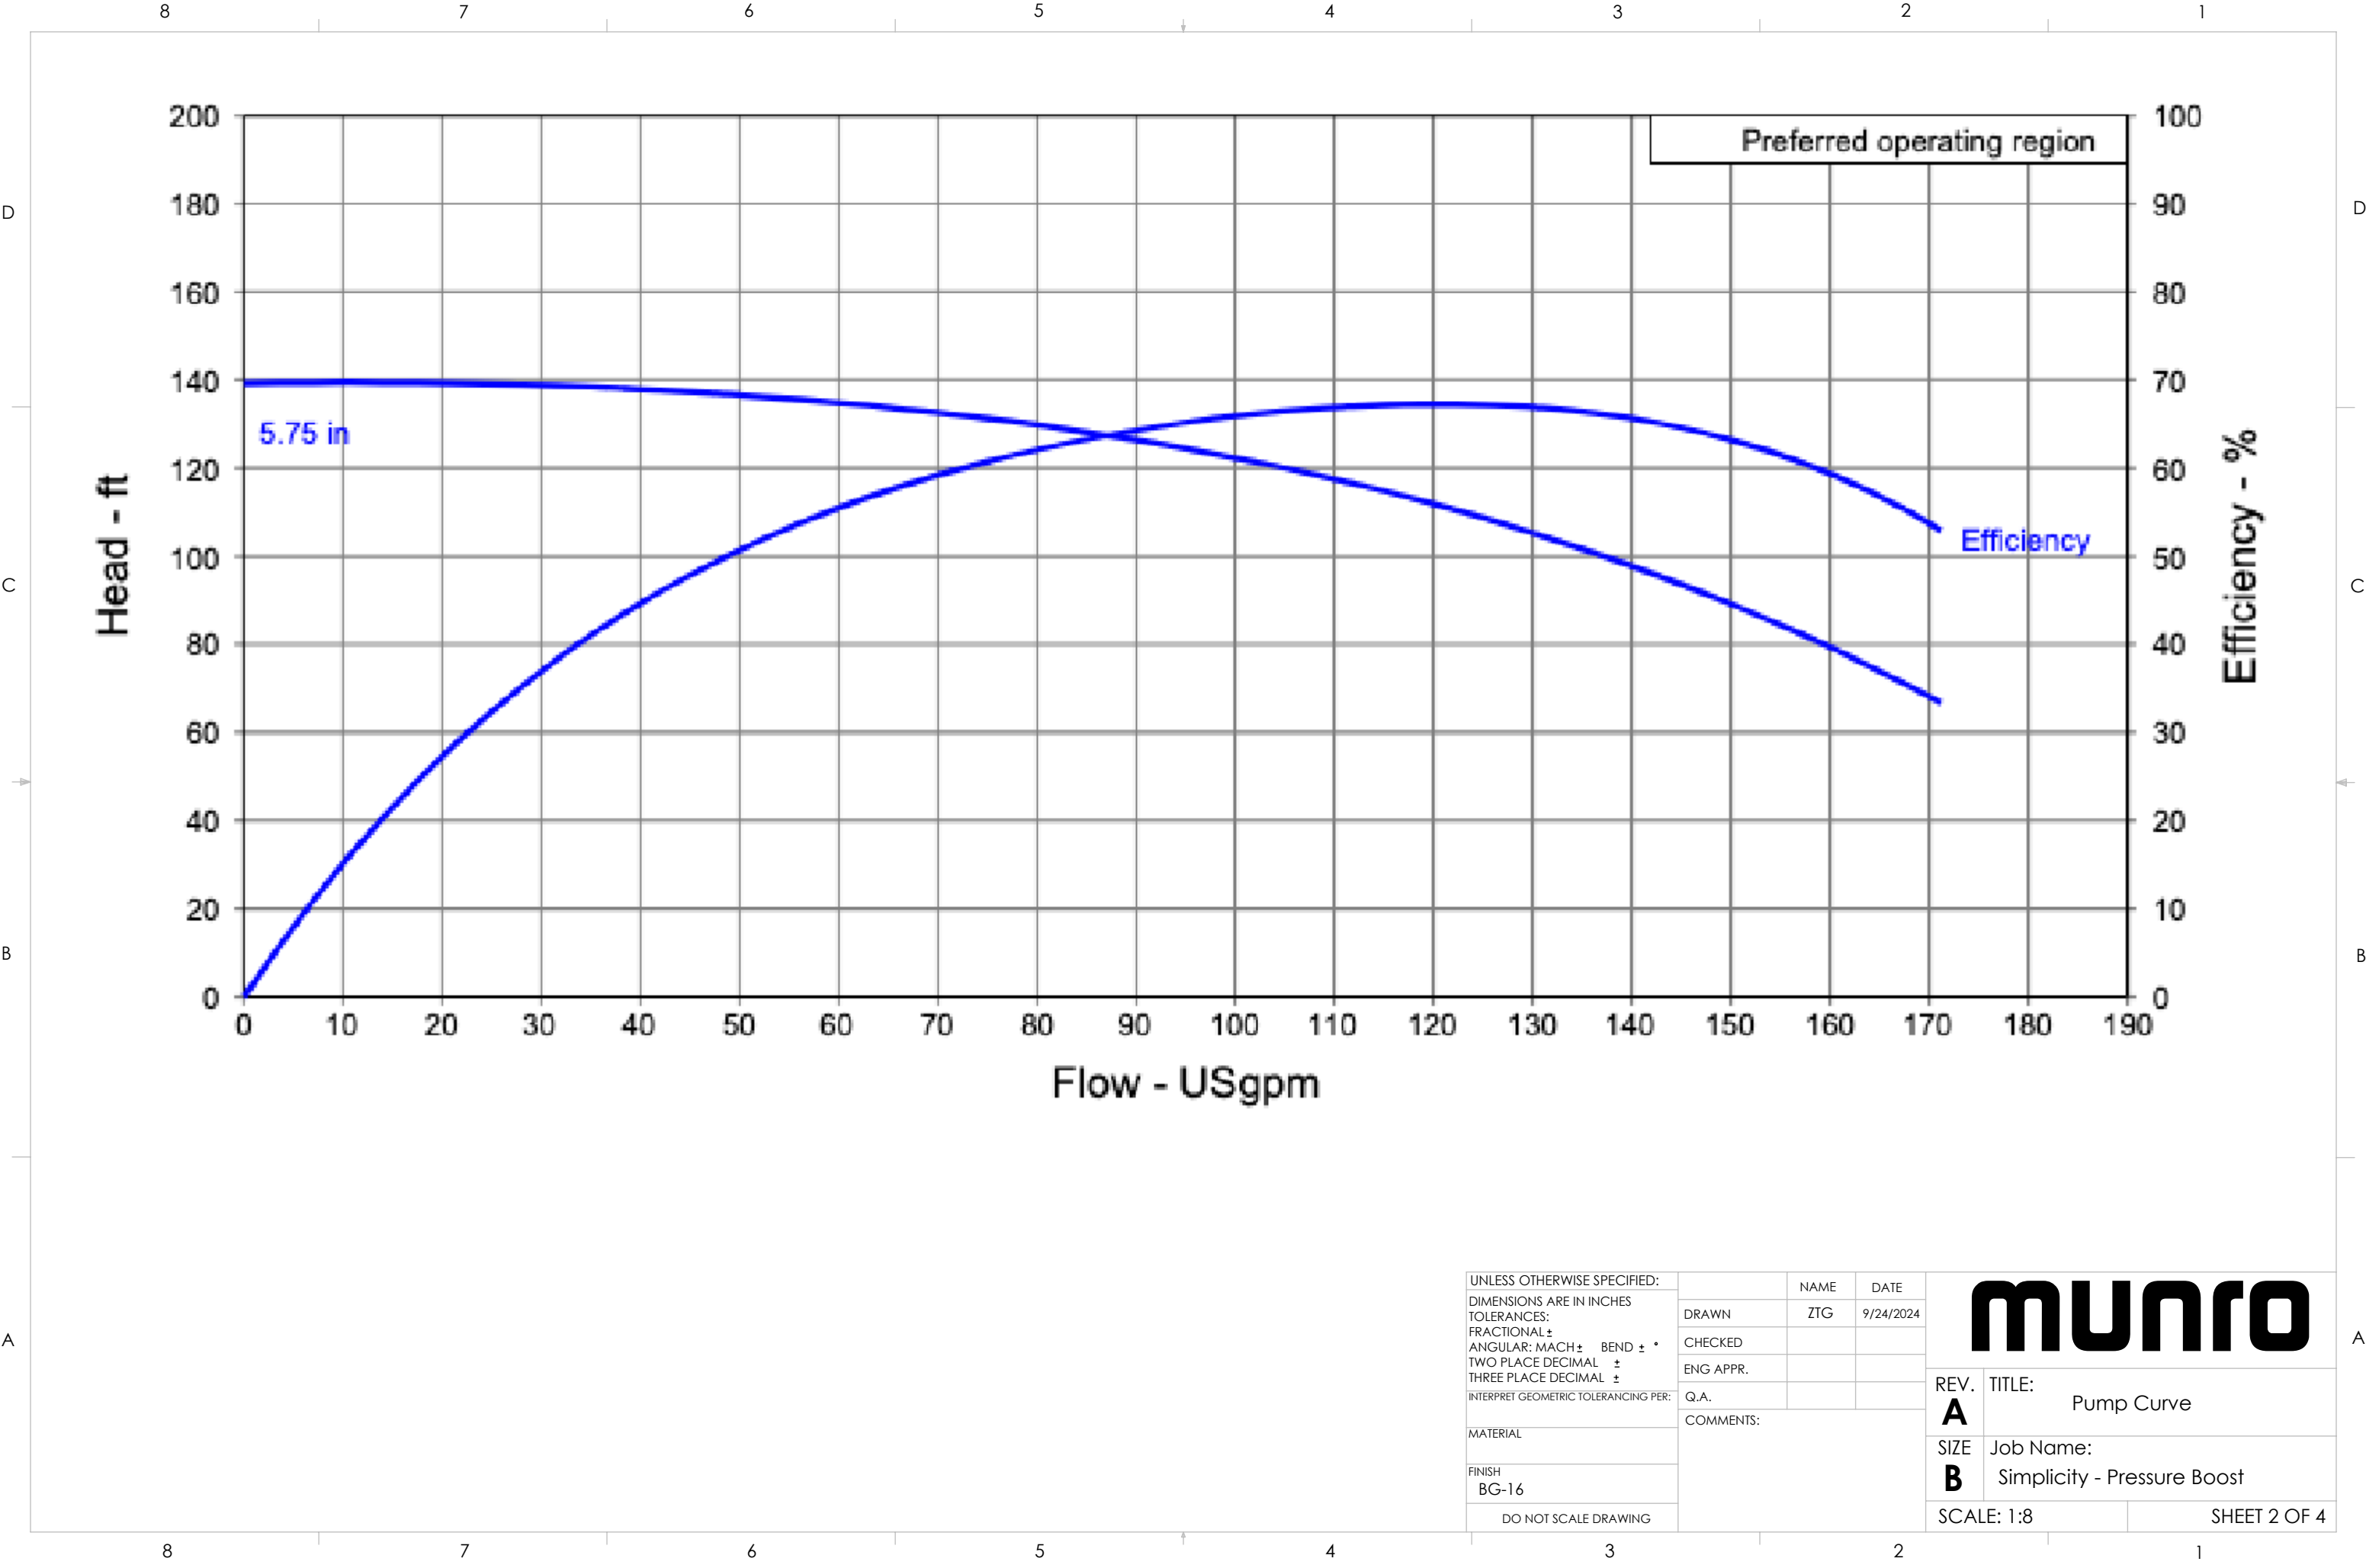

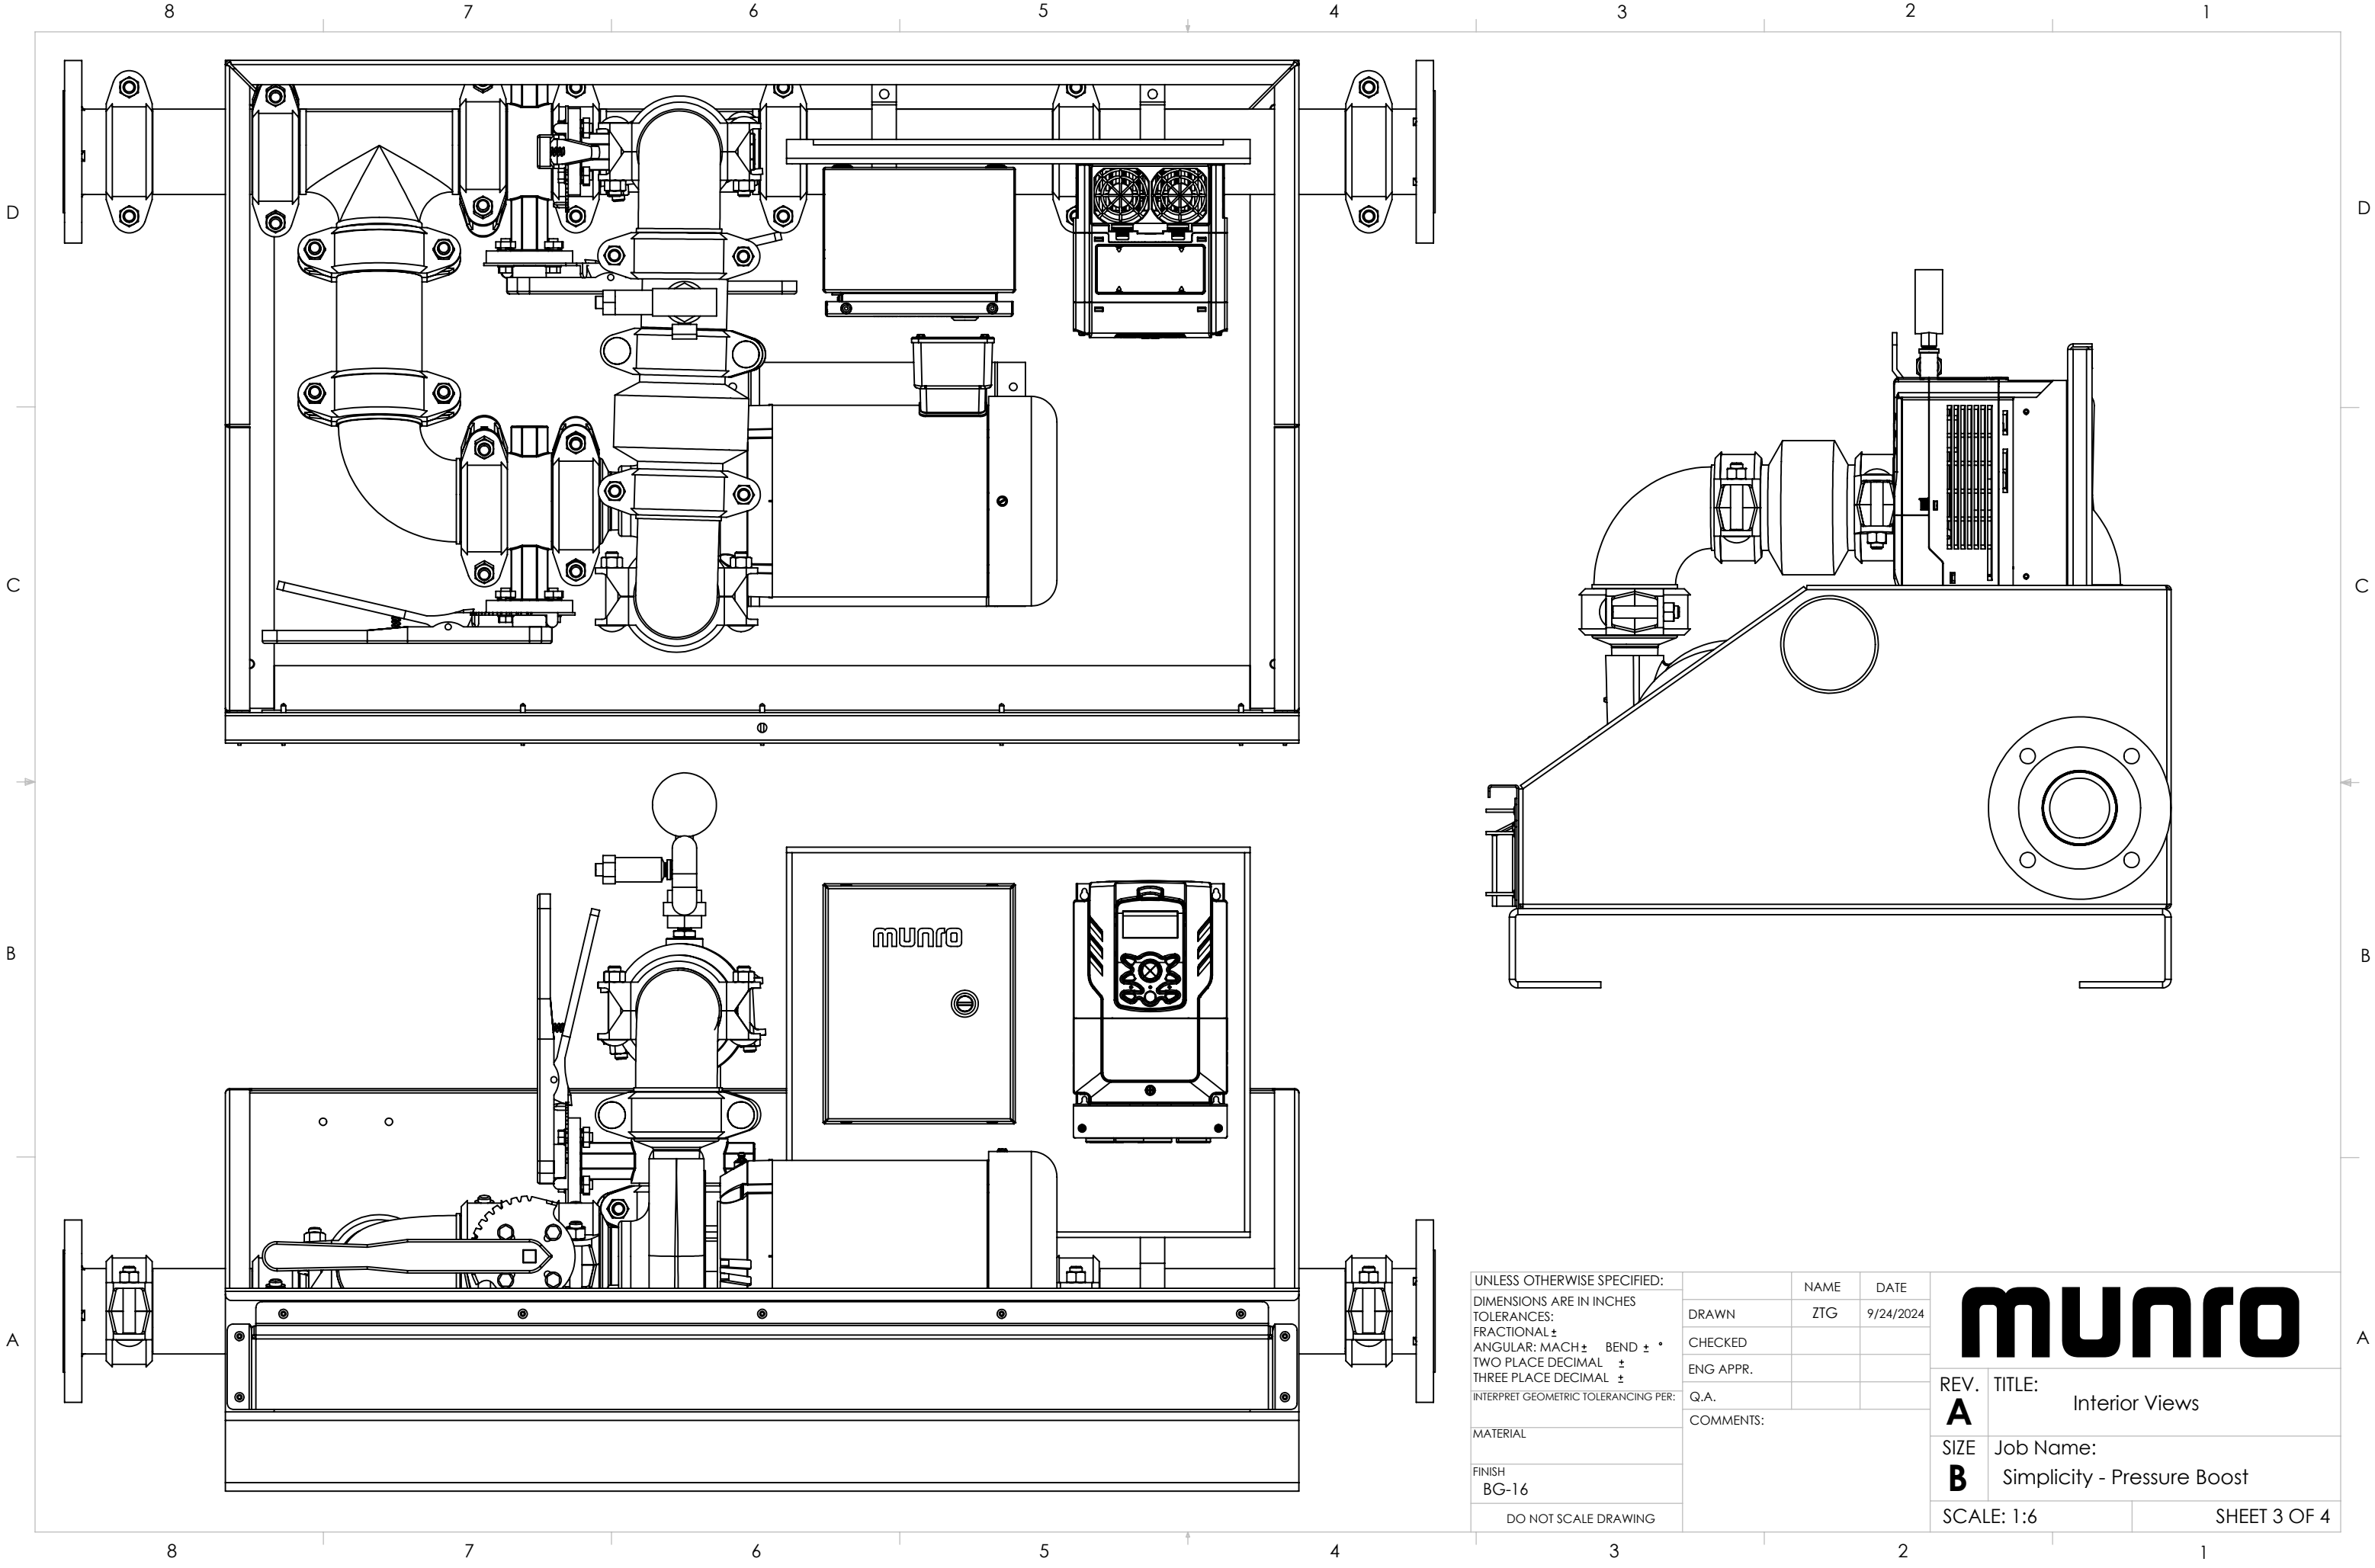

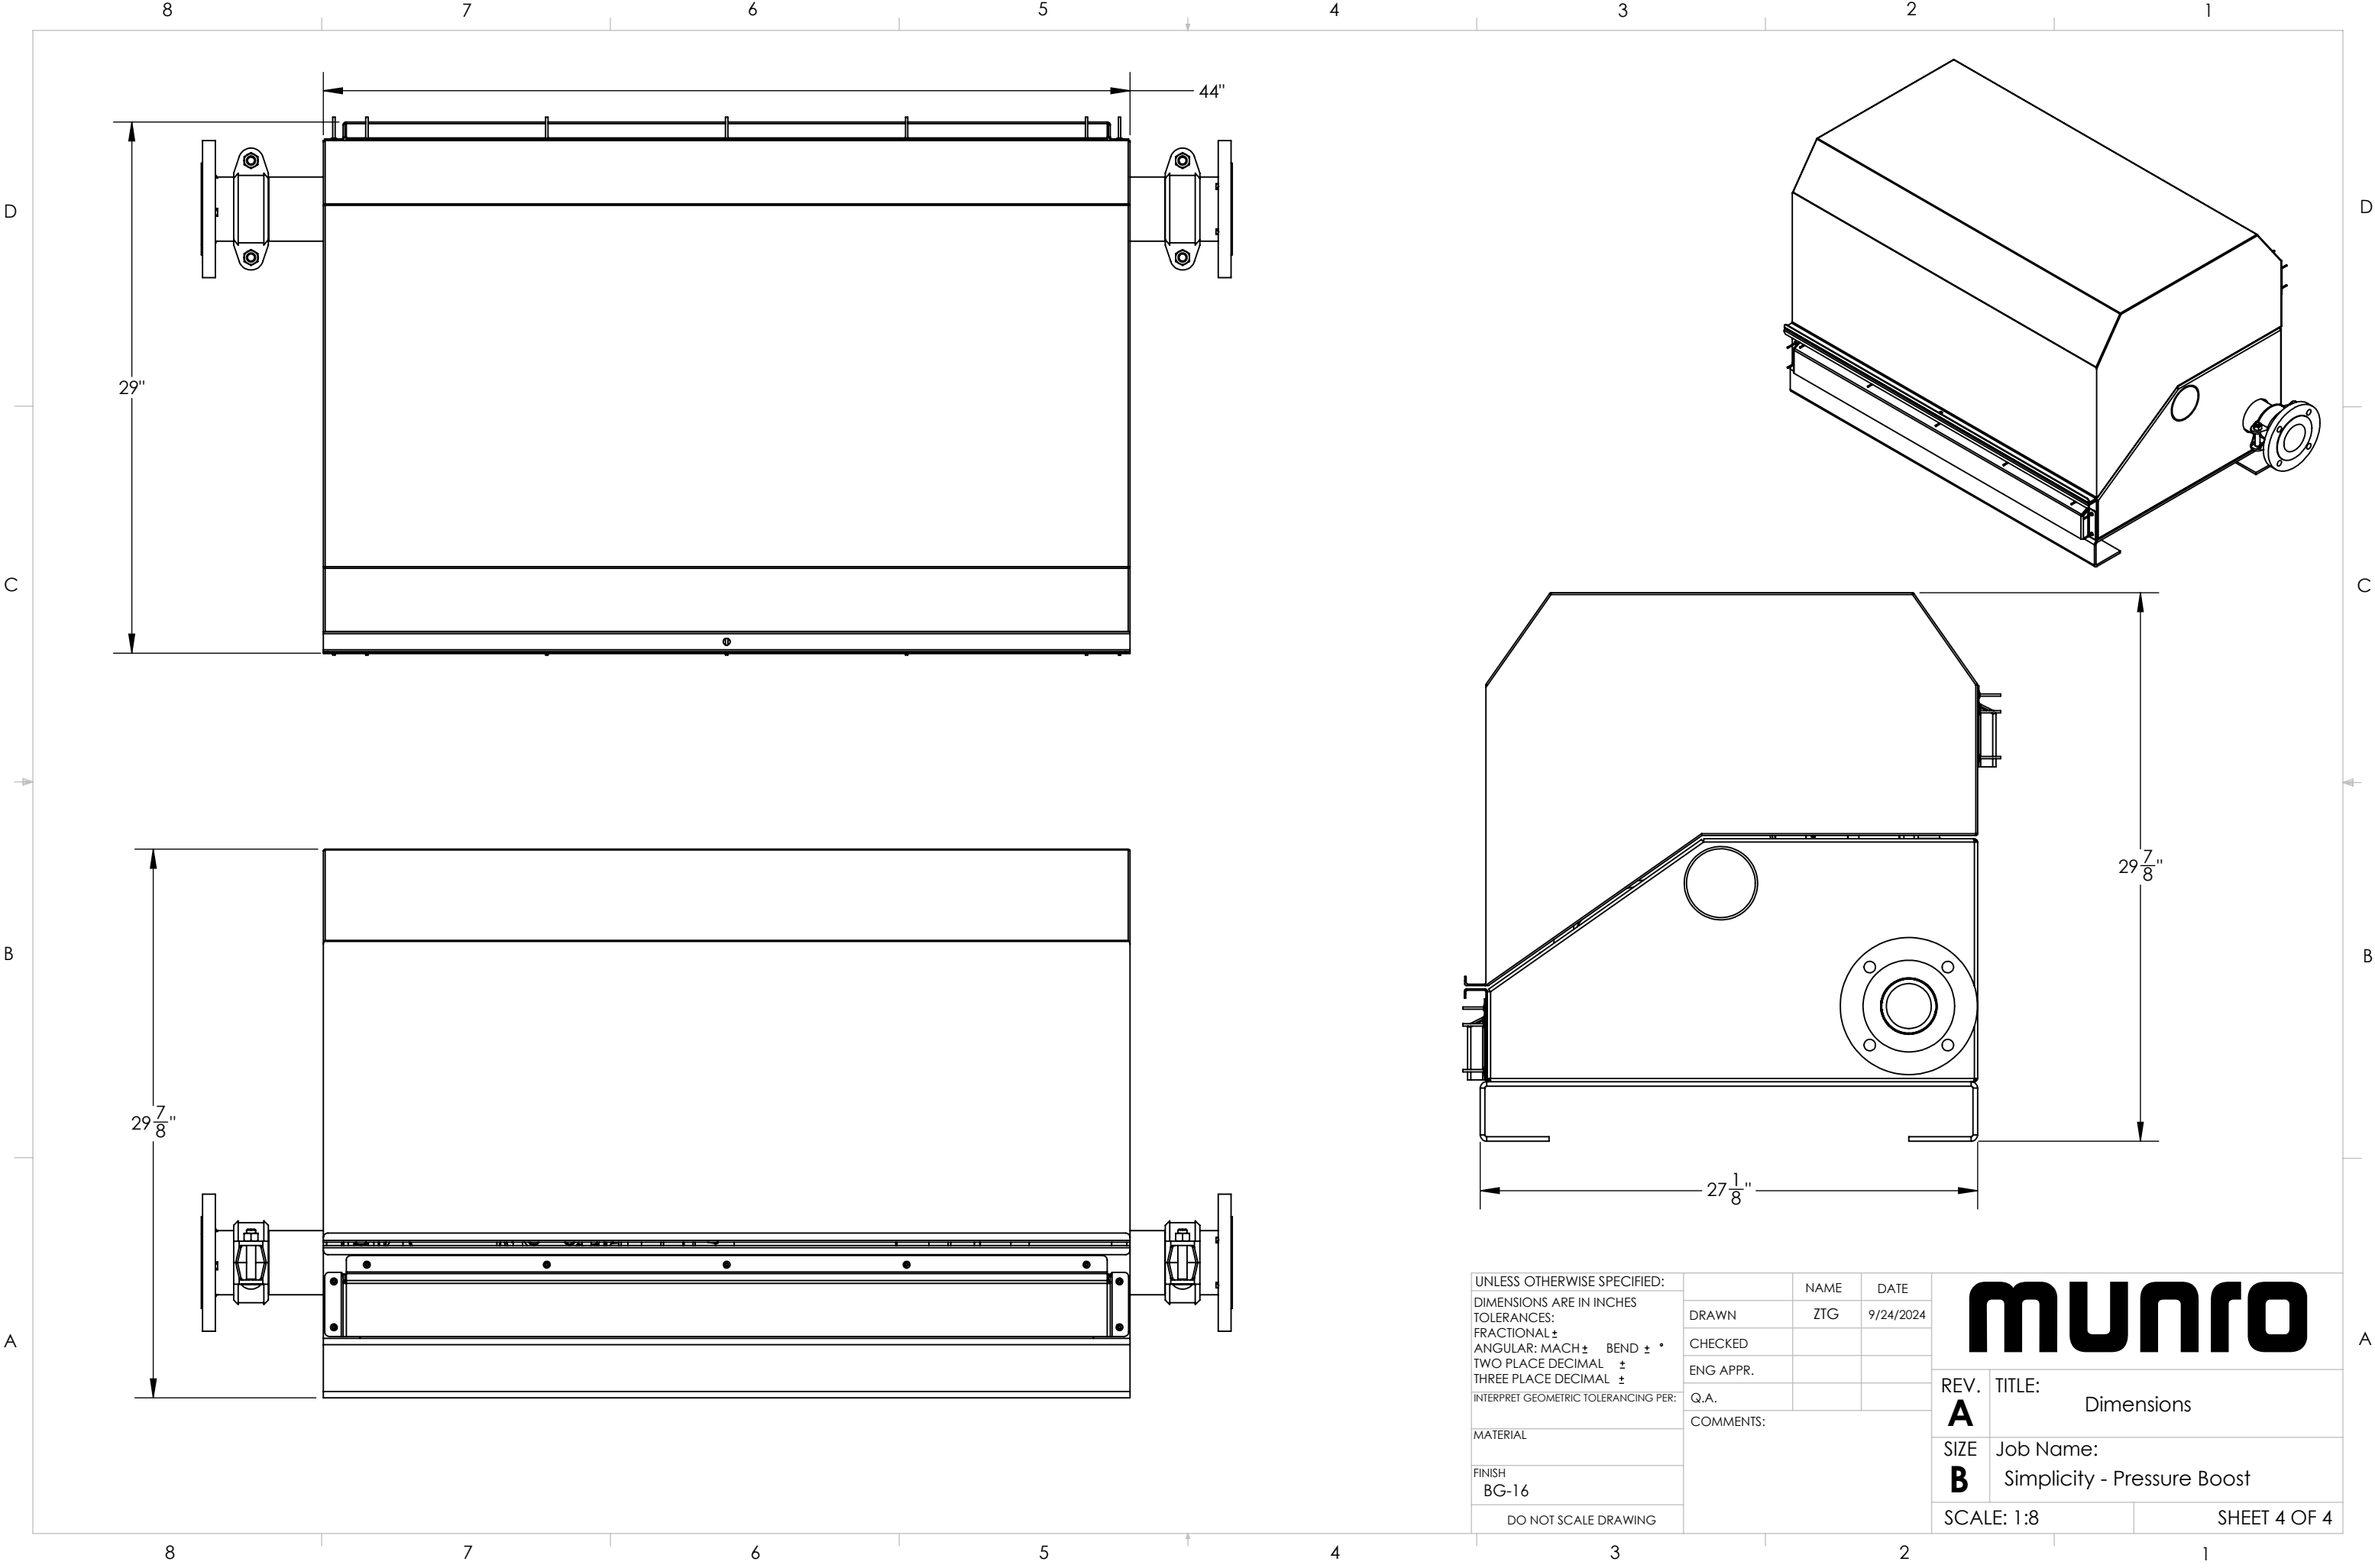

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± ° TWO PLACE DECIMAL ± THREE PLACE DECIMAL ± INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL FINISH BG-16 DO NOT SCALE DRAWING				DRAWN ZTG	NAME ZTG	DATE 9/24/2024	<div>munro</div> <div>REV. A TITLE: Dimensions</div> <div>SIZE B Job Name: Simplicity - Pressure Boost</div> <div>SCALE: 1:8 SHEET 4 OF 4</div>	
				CHECKED				
				ENG APPR.				
				Q.A.				
				COMMENTS:				